

Manhole cover class D400 with concrete-filled cover

Cover seating depth: 50 mm

D400 manhole cover, made of grey cast iron, with a concrete-filled cover, clear opening \varnothing 600, seating depth 50 mm, with a damping insert in the frame.

Standard: PN-EN 124-2:2015-7

Material:

cover – grey cast iron, concrete C35/45 XF4

frame – grey cast iron

Cover diameter: 640 mm



Cover seating depth: 50 mm

Locking: 2 bolts screwed in place (applies to versions with locking)

Marking: LK, D400, EN 124-2, IO-CERT, construction mark B

Application: for installation in road carriageways (including pedestrian streets), hard shoulders, and parking areas, for all types of road vehicles

Manhole cover variant	Frame height [mm]	Index	Qty/pallet
Manhole cover LK 600, class D400, concrete-filled cover with 50 mm seating depth	115	81546	10
	150	81548	10
Manhole cover LK 600, class D400, concrete-filled cover with 50 mm seating depth, with locking	115	81547	10
	150	81549	10

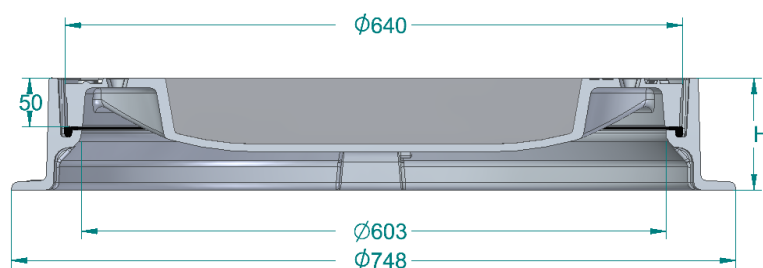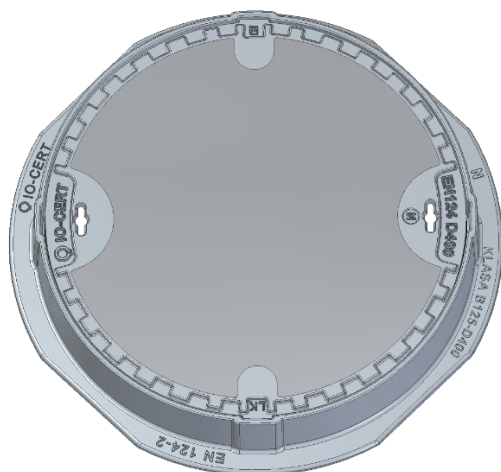

All products feature cover positioning in the frame. It is possible to order manhole covers without cover positioning. Products are not painted.

Custom branding: upon prior arrangement, it is possible to place the customer's logo on the manhole cover.

Product warranty: 36 months.

Note: Follow installation, operation, and maintenance instructions.

The product cross-section shown in the drawing is for reference only—we reserve the right to introduce design changes to improve the product.