


Manhole cover class B125

Manhole cover class B125, made of grey cast iron, clear opening \varnothing 600, with a damping insert in the frame.

Standard: PN – EN 124-2:2015-7

Material: cover – grey cast iron
frame – grey cast iron

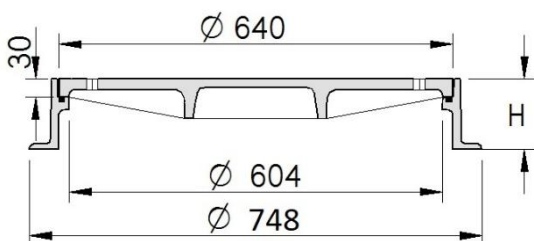

Manhole cover variant	Frame height [mm]	Index	Qty/pallet
Manhole cover LK 600, class B125	80	81318	16
	115	81302	14
	150	81310	10
Manhole cover LK 600, class B125, ventilated	80	81320	16
	115	81304	14
	150	81312	10
Manhole cover LK 600, class B125, with locking	80	81322	16
	115	81306	14
	150	81314	10
Manhole cover LK 600, class B125, ventilated with locking	80	81324	16
	115	81308	14
	150	81316	10

Cover diameter: 640 mm

Cover seating depth: 30 mm

Locking: 2 bolts screwed in place (applies to versions with locking)

Marking: LK, B125, EN 124-2, IO-CERT, construction mark B

Application: for installation in pedestrian areas and equivalent zones, parking areas, or areas for passenger cars

Frames H80 are equipped with holes enabling fixing (anchoring) to the base. All products feature cover positioning in the frame. It is possible to order covers without positioning in the frame.

Products are not painted.

Custom branding: upon prior arrangement, it is possible to place the customer's logo on the cover.

Product warranty: 36 months.

Note: Follow installation, operation, and maintenance instructions.

The product cross-section shown in the drawing is for reference only—we reserve the right to introduce design changes to improve the product.