


Manhole cover class C250

Manhole cover class C250, made of grey cast iron, clear opening \varnothing 600, with a damping insert in the frame.

Standard: PN – EN 124-2:2015-7

Material: cover – grey cast iron
frame – grey cast iron

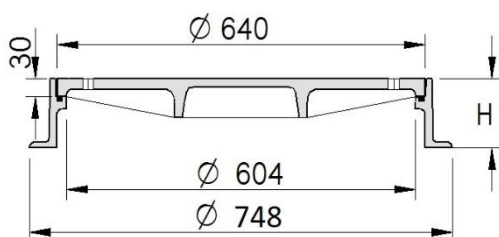

Odmiana wjazdu	Frame height [mm]	Indekx	Qty/pallet
Manhole cover LK 600, class C250	80	81342	12
	115	81326	12
	150	81334	10
Manhole cover LK 600, class C250, ventilated	80	81344	12
	115	81328	12
	150	81336	10
Manhole cover LK 600, class C250, with locking	80	81346	12
	115	81330	12
	150	81338	10
Manhole cover LK 600, class C250, ventilated with locking	80	81348	12
	115	81332	12
	150	81340	10

Cover diameter: 640 mm

Cover seating depth: 30 mm

Locking: 2 bolts screwed in place (applies to versions with locking)

Marking: LK, C250, EN 124-2, IO-CERT, construction mark B

Application: areas for installation in pedestrian areas and equivalent zones, parking, or areas for passenger cars

Frames H80 are equipped with holes enabling fixing (anchoring) to the base. All products feature cover positioning in the frame. It is possible to order covers without positioning in the frame.

Products are not painted.

Custom branding: upon prior arrangement, it is possible to place the customer's logo on the cover.

Product warranty: 36 months.

Note: Follow installation, operation, and maintenance instructions.

The product cross-section shown in the drawing is for reference only—we reserve the right to introduce design changes to improve the product.