


D400 self-levelling manhole cover, H165, designed for installation with a \varnothing 675 mm ring

D400 self-levelling manhole cover, clear opening \varnothing 600, with a damping insert in the frame.

Standard: PN – EN 124-2:2015-7

Material: cover – grey cast iron and concrete
frame – grey cast iron

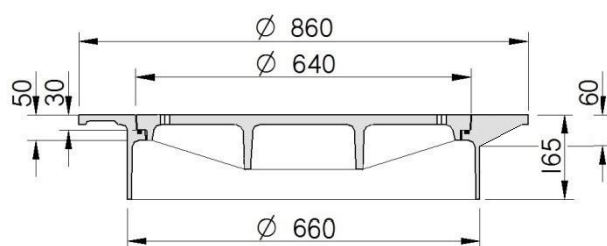

The product cross-section shown in the drawing is for reference only – we reserve the right to introduce design changes to improve the product.

Manhole cover variant	Index	Qty/ pallet
Manhole cover LK 600, class D400, self-levelling, H165, designed for installation with a \varnothing 675 mm ring	81374	6
Manhole cover LK 600, class D400, self-levelling, H165, designed for installation with a \varnothing 675 mm ring, ventilated	81376	6
Manhole cover LK 600, class D400, self-levelling, H165, designed for installation with a \varnothing 675 mm ring, with locking	81378	6
Manhole cover LK 600, class D400, self-levelling, H165, designed for installation with a \varnothing 675 mm ring, ventilated with locking	81380	6
Manhole cover LK 600, class D400, self-levelling, H165, designed for installation with a \varnothing 675 mm ring, concrete-filled cover	81430	6
Manhole cover LK 600, class D400, self-levelling, H165, designed for installation with a \varnothing 675 mm ring, concrete-filled cover, with locking	81434	6

Cover diameter: 640mm

Cover seating depth: 30/50 mm

Locking: 2 bolts screwed in place (applies to versions with locking)

Marking: LK, D400, EN 124-2, IO-CERT, construction mark B

Application: for installation in road carriageways (including pedestrian streets), hard shoulders, and parking areas, for all types of road vehicles

All products feature cover positioning in the frame. It is possible to order manhole covers without cover positioning.

Products are not painted.

Custom branding: upon prior arrangement, it is possible to place the customer's logo on the cover.

Product warranty: 36 months.

Note: Follow installation, operation, and maintenance instructions.