

## Ductile iron gully inlet 600 × 400, class D400, H100, ¾ flange, hinged grating with locking

**Standard:** PN – EN 124-2:2015-7

**Material:** Grating, frame – ductile iron EN-GJS-500-7

**Marking:** LK, D400, EN124-2, IO-CERT,  
Construction mark B


**Grating dimensions:** 600mm x 400mm

**Water drainage area:** 768 cm<sup>2</sup>

**Locking:** bolt


**Application:** for installation in areas classified as Group 4 (according to PN-EN 124-1)

Installation of a sediment basket (type D1 or C3) is possible using an adapter (index 81160).


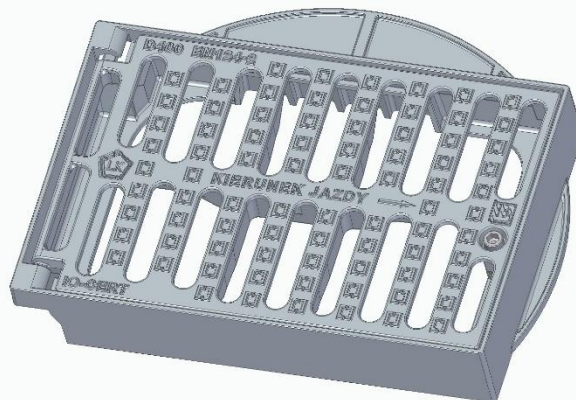


Product name	Index	Qty / pallet
Ductile iron gully inlet 600 × 400, class D400, H100, ¾ flange, hinged grating with locking	81508	22

Przekrój A-A

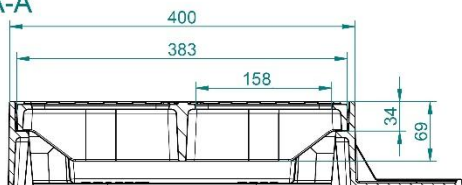

Przekrój B-B

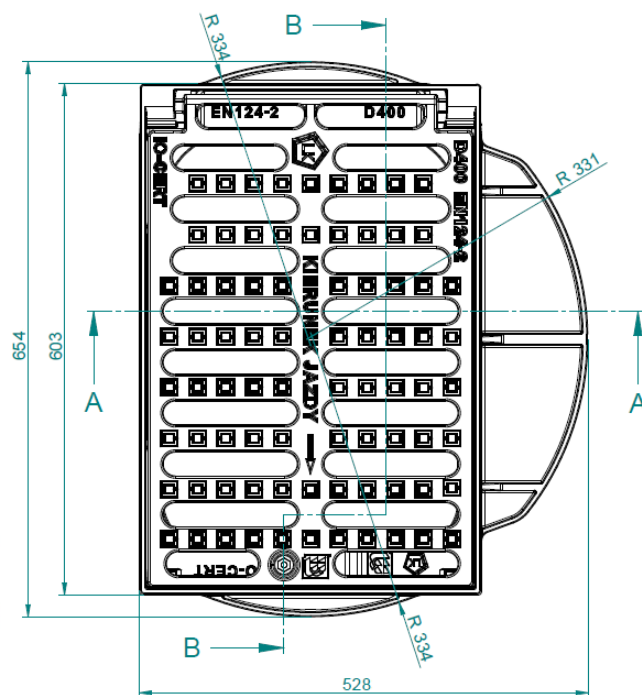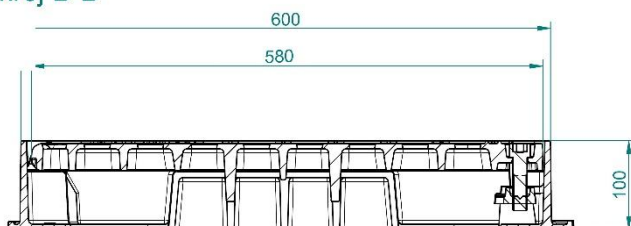

Notes: Products are not painted.

Custom branding: upon prior arrangement, it is possible to place the customer's name on the grating. Follow installation, operation, and maintenance instructions.

**Product warranty:** 36 months

The product cross-section shown in the drawing is for reference only—we reserve the right to introduce design changes to improve the product.