
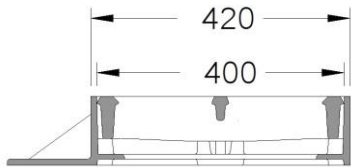


Gully inlet 600 × 400, class D400

Gully inlet 600 × 400, class D400, made of grey cast iron

Standard: PN – EN 124-2:2015-7

Material: Grating – grey cast iron
Frame – grey cast iron

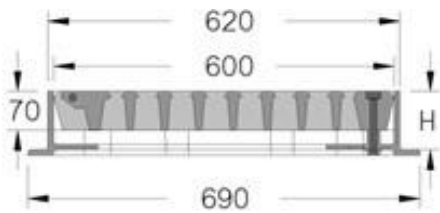

Gully inlet variant	Frame height [mm]	Index	Qty / pallet
Gully inlet 600 × 400, D400, without flange, loose grating	15	81458	12
Gully inlet 600 × 400, D400, without flange, hinged grating	115	81459	12
Gully inlet 600 × 400, D400, without flange, hinged grating with locking	115	81460	12

Gully inlet 600 × 400, D400, 3/4 flange, loose grating	115	81464	12
Gully inlet 600 × 400, D400, 3/4 flange, hinged grating	115	81465	12
Gully inlet 600 × 400, D400, 3/4 flange, hinged grating with locking	115	81466	12

Gully inlet 600 × 400, D400, full flange, loose grating	115	81470	12
Gully inlet 600 × 400, D400, full flange, hinged grating	115	81471	12
Gully inlet 600 × 400, D400, full flange, hinged grating with locking	115	81472	12

Grating dimensions: 600 × 400 mm

Inlet area: 10.6 dm²

Grating seating depth: 70 mm

Grating opening angle: 120°

Marking: LK, D400, EN 124-2, IO-CERT, construction mark B

Locking (option): grating fixed with a screw

Application: for installation in road carriageways (including pedestrian streets), hard shoulders, and parking areas, for all types of road vehicles

Installation of a sediment basket (type D1 or C3) is possible using an adapter (index 81160).

Products are not painted.

Custom branding: upon prior arrangement, it is possible to place the customer's name on the grating.

Product warranty: 36 months

Note: Follow installation, operation, and maintenance instructions.

The product cross-section shown in the drawing is for reference only—we reserve the right to introduce design changes to improve the product.