


Manhole cover class D400

D400 manhole cover, made of grey cast iron, clear opening \varnothing 600, with a damping insert in the frame.

Standard: PN – EN 124-2:2015-7

Material: cover – grey cast iron
frame – grey cast iron

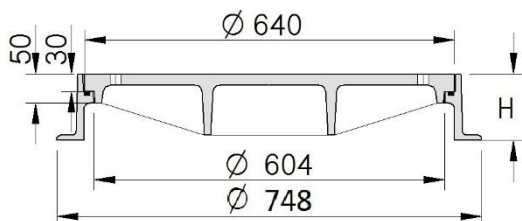

Manhole cover variant	Frame height [mm]	Index	Qty / pallet
Manhole cover LK 600, class D400	80	81366	12
	115	81350	12
	150	81358	10
Manhole cover LK 600, class D400, ventilated	80	81368	12
	115	81352	12
	150	81360	10
Manhole cover LK 600, class D400, with locking	80	81370	12
	115	81354	12
	150	81362	10
Manhole cover LK 600, class D400, ventilated with locking	80	81372	12
	115	81356	12
	150	81364	10

Cover diameter: 640 mm

Cover seating depth: 30/50 mm

Locking: 2 bolts screwed in place (applies to versions with locking)

Marking: LK, D400, EN 124-2, IO-CERT, construction mark B

Application: for installation in road carriageways (including pedestrian streets), hard shoulders, and parking areas, for all types of road vehicles

Frames H80 are equipped with holes enabling fixing (anchoring) to the base. All products feature cover positioning in the frame. It is possible to order manhole covers without cover positioning.

Products are not painted.

Custom branding: upon prior arrangement, it is possible to place the customer's logo on the manhole cover.

Product warranty: 36 months.

Note: Follow installation, operation, and maintenance instructions.

The product cross-section shown in the drawing is for reference only — we reserve the right to introduce design changes to improve the product.